


Frequency 2 - 4 GHz  
 Power 15 KW (Peak) 1200 Watts (AVE) into maximum output VSWR of 2:1  
 VSWR 2.0:1 (MAX) 1.75:1 (TYP)  
 Insertion Loss .7dB (MAX)  
 Isolation -13 dB (MIN) -16 dB (TYP)

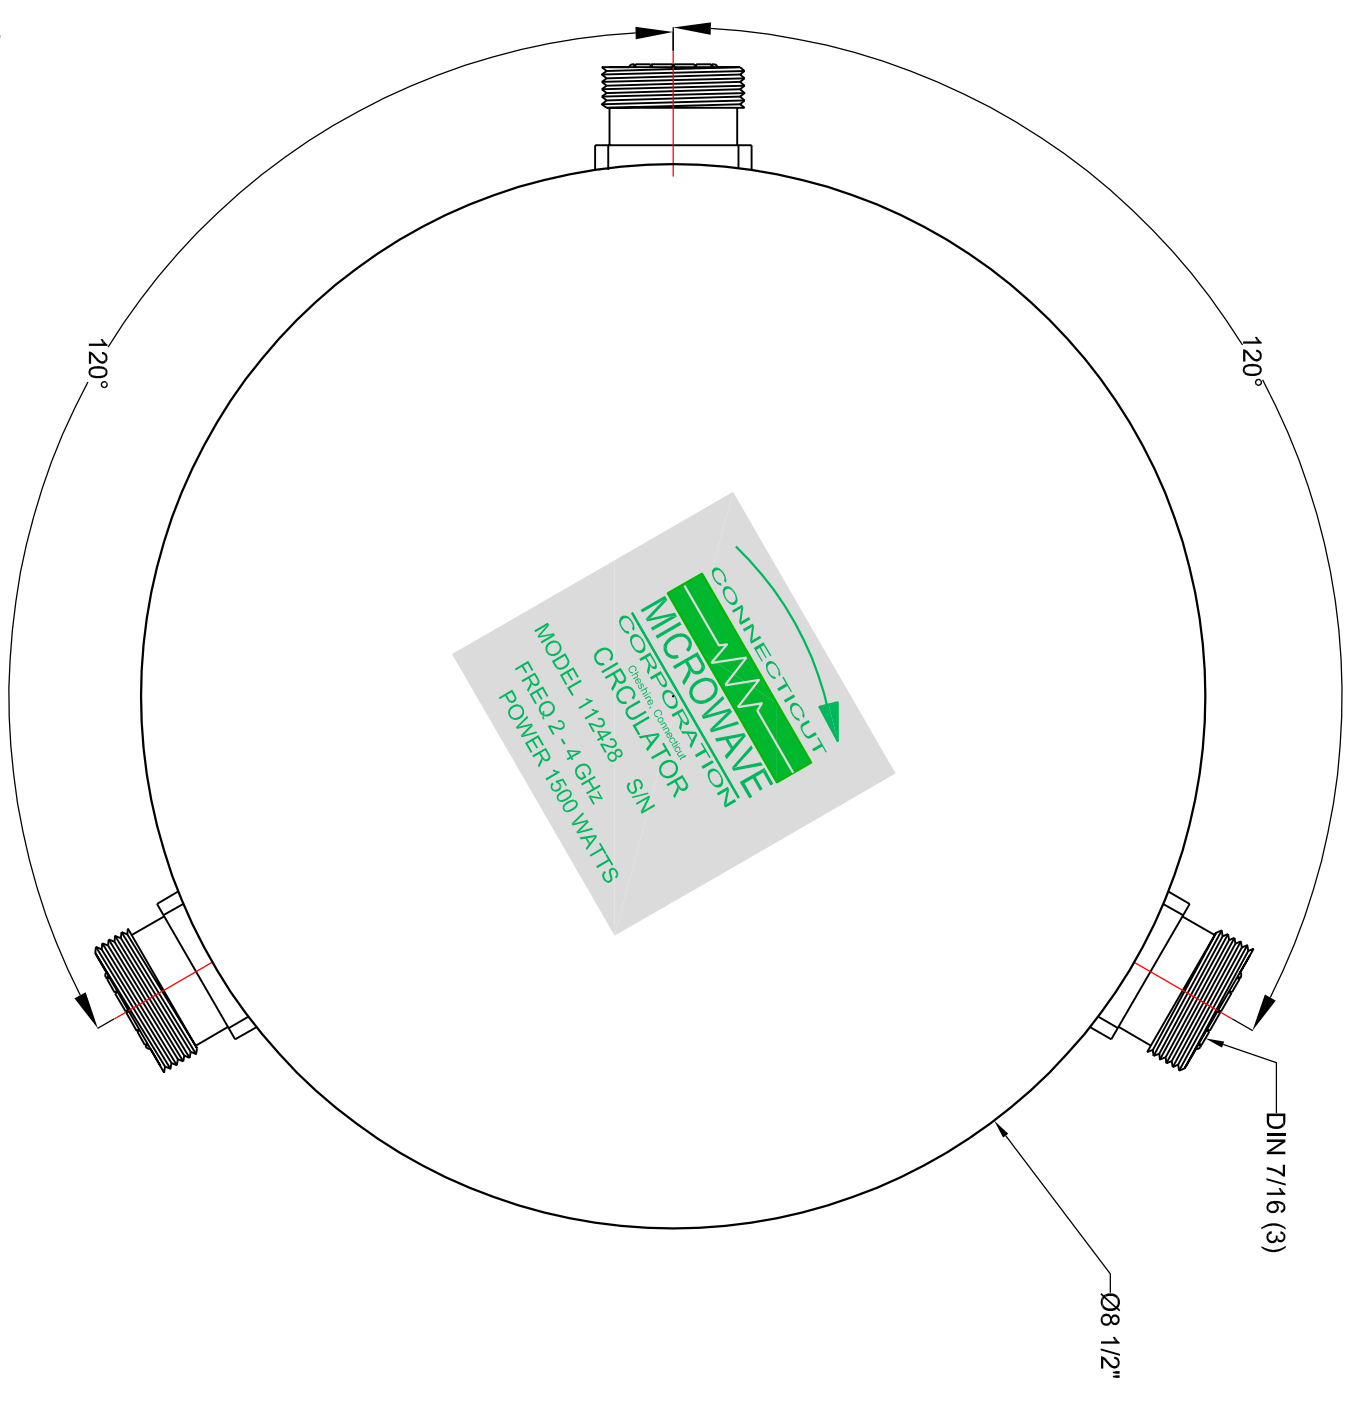

1. FINISH: IRIDITE ONE COAT GREY PRIMER 2 COATS
2. GREY TOP COAT

REV	ECD NBR	DATE	ENG	DESCRIPTION	CONNECTICUT MICROWAVE CORPORATION	CONNECTICUT MICROWAVE CORP. 1486 Highland Ave. Cheshire, Connecticut 06410	BY RR	DATE 6/1/06	TITLE OUTLINE CIRCULATOR	DWG NO. CM627.0001	REV A
A	REMOVED	1/31/07		INSPECTION PARTS			RR				

THIS DOCUMENT CONTAINS PROPRIETARY DATA OF THE CONNECTICUT MICROWAVE CORPORATION. NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART THEREOF MAY BE MADE EXCEPT BY WRITTEN PERMISSION.

TOLERANCES UNLESS NOTED  
 .XX ± .01 .XXX ± .005  
 ALL V INDICATES 32 MICRONS  
 ALL DIMENSION IN INCHES  
 UNLESS OTHERWISE NOTED  
 MUST COMPLY WITH WORKMANSHIP  
 STANDARDS SPEC